





R-4



Rating: 16A 125V AC (UL CUL )  
16(4)A 250V AC (UL CUL VDE ENEC CB CQC)



Contact Resistance: 50m Ω (Max)  
Insulation Resistance: DC 500V 100M Ω (Min)

Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C


Safety Approval:

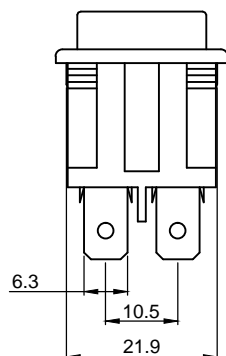

CUT-OUT



	X	Y
0.75~1.25	28.0+0.10	22.0+0.10
1.25~2.00	28.2+0.10	22.0+0.10
2.00~3.00	28.4+0.10	22.0+0.10



MATERIAL:

Body:Nylon66,UL rated:94V-0  
Actuator:Nylon66,UL rated:94V-0  
Terminal:Brass with silver-plate

Marking	X	0	1	2	3	4	5	7	8	P
	柄	None	●	ON OFF	≡ —	— ○	— ○	Front/前进 Back/后退	Front Back	ON OFF

			公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ± 1°		单位 DIMENSION UNIT mm.	
			版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2014.07.15	品名 TITLE	
			核准 APPROVED BY	王龙	核对 CHECKED BY	杜沛钧	绘图 DRAWN BY	黎夏	R-4-210-CXL-BR-220	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.							图号 DRAWING NO
									R-4-210-CXL-BR-220_A0	